

AKWA+FLEX-30

Tunable White SPECIFICATION SHEET

Project Name:

Specifier:

Location:

Product Code:



Material:
Silicone



Impact Rating:
IK08



Weatherproof Rating:
IP68
Wet Location



Operating Temp:
-40°F - 131°F



Bending Direction:
Horizontal



UL Listed



Beam Angle:
120°




Dimmable:
0-10V, DMX




Bend Diameter:
>3.15"



CRI:
>80+

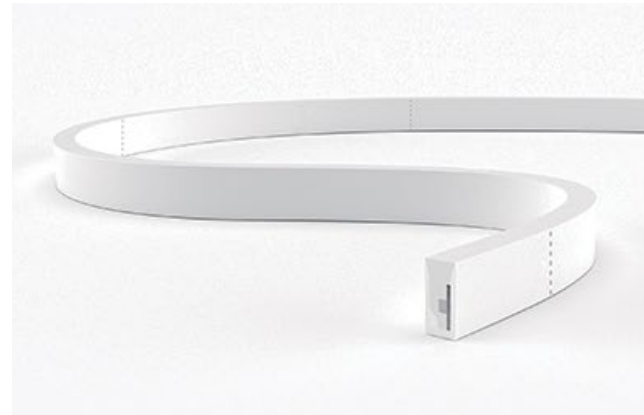

	AKWA Silicone Resin Encapsulation Horizontal Bend
Input Voltage	24V
Power Consumption	4.0W/ft
Standard CRI	>80
LEDs per foot/m	36 120
Incremental length in/mm	3.93" 100mm



Color	Lumen Output [lm/ft]
2200K + 5700K	
2200K	76lm
5700K	85lm

Other LED Options	Mono - for single colors refer to the AF30 Mono Spec sheet
Control	0-10V · DMX
Optics	opal symmetrical 120° diffuser
Finish	white
Mounting	surface · wall
Accessories	mounting channel / profile

Due to tolerances of the production process and the electrical components, values for light output, color temperature and electrical power can vary up to 10%.

How to specify KLIK USA AKWA Flex 30. **Example of specification:** AF30TUNXX.XBBADIM

Fixture Type	Color Temp [K]	Nominal Length [feet] with one feed ^{1,2}	Power Entry Location ³	Nominal Power Entry Termination	Mounting Profiles & Brackets	Accessories	Control
AF30	TUN 2200-5700K	XX.X Specify run Length [ft]	B Back one end B2 Back each end E End Plate one end E2 End Plate each end SL Side - Left SR Side- Right SLR Side - Left+Right	B Bare cable with anti-wick ferrule [Std] M Male IP68 Connector F Female IP68 Connector	A AF30S02 B AF30S02FLX	- Profile [Std] A AF30ADJ	DIM 0-10V Dim [Std] DMX1 DMX 1 Ch

1. Specify length of run

2. Max run length per power entry feed is 21' [6.4m] and 42' [12.8m] for 2 x feeds [one at each end]

3. B2, E2 & SLR only required if exceeding the maximum single power entry as indicated above, thus requiring TWO power entries.

AKWA+FLEX-30

POWER ENTRY LOCATIONS



B

Power entry from the **BACK** of the fixture [one end]



B2

Power entry from the **BACK** of the fixture [both ends] [for fixture length >21']




E

Power entry from the **END** of the fixture [one end]



E2

Power entry from the **END** of the fixture [both ends] [for fixture length >21']



SL

Power entry from the **SIDE** of the fixture [LHS]



SR


Power entry from the **SIDE** of the fixture [RHS]



SLR


Power entry from the **SIDE** of the fixture [both L&R] [for fixture length >21']

POWER ENTRY ORIENTATION


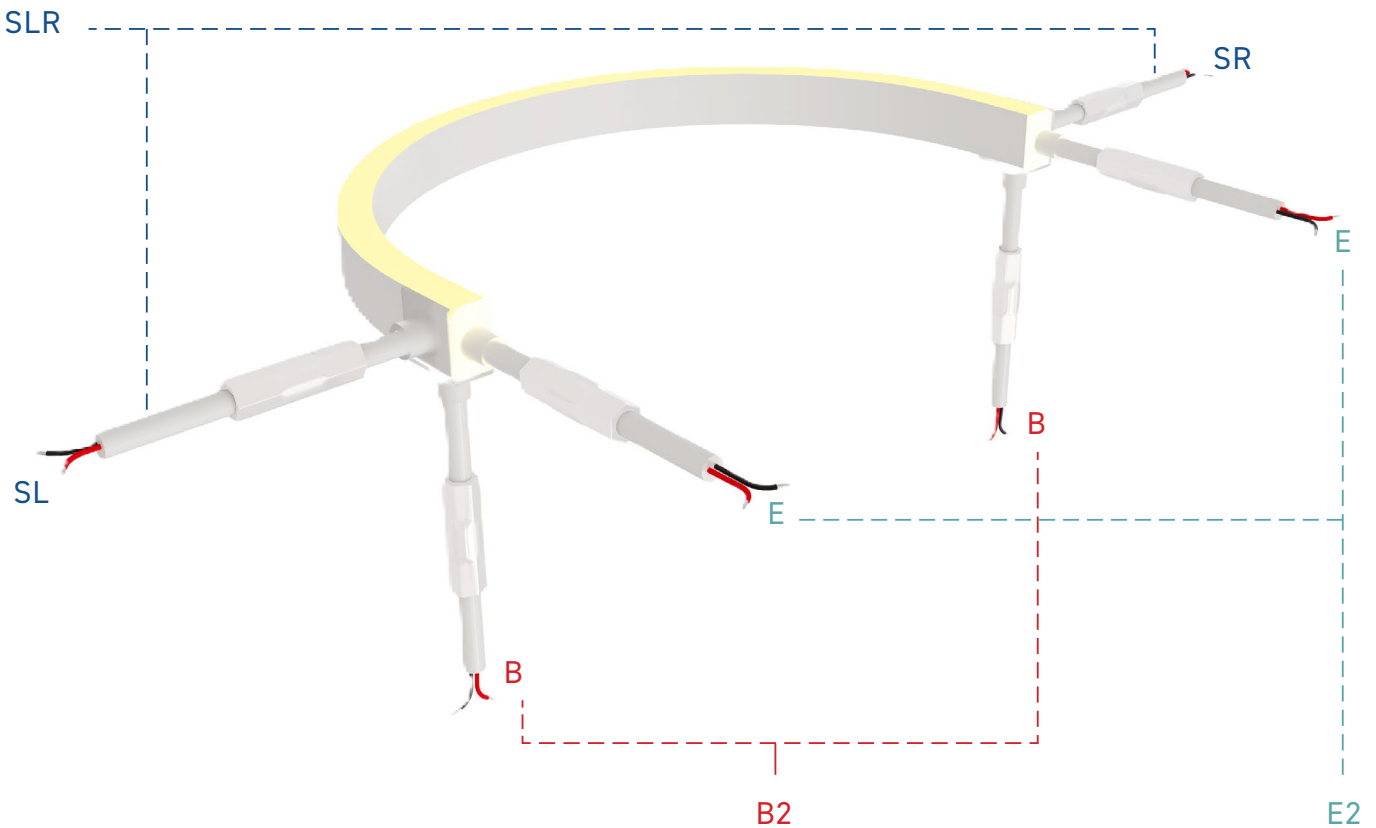


AKWA+FLEX-30 WIRING DIAGRAMS



TUNABLE WHITE

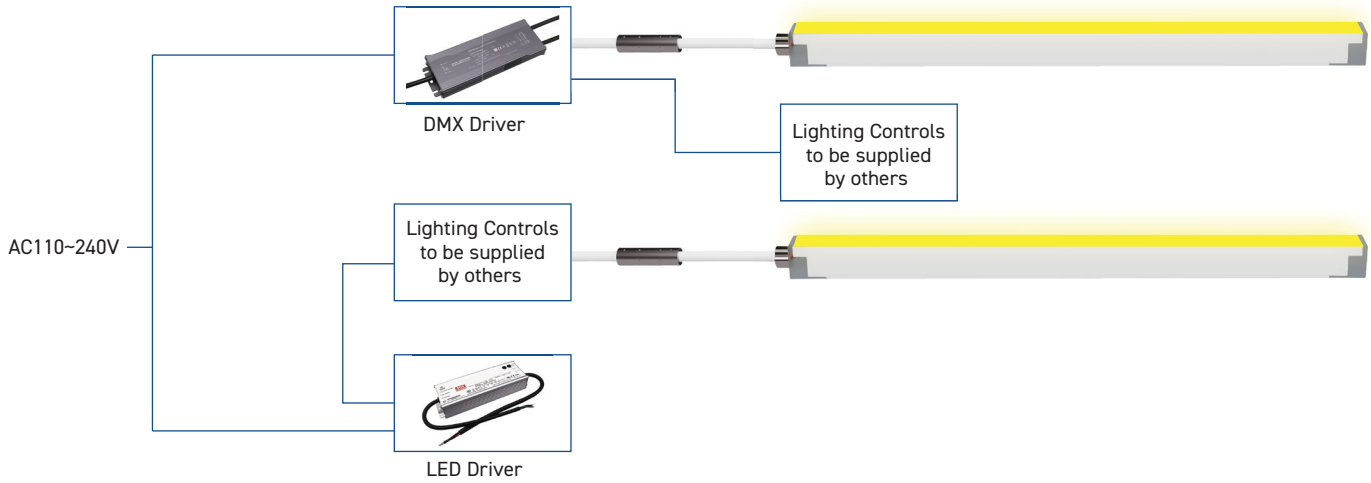

MOUNTING OPTIONS




A - AF30S02



B - AF30S02FLX

ACCESSORIES



Adjustable Bracket - A - AF30ADJ